




**ELLO** brings a new and fresh feel to the lockers world. The new look of latch locks is proudly introduced to the market place.


### Main Features:

- ✦ Free wheel turning system
- ✦ Body and head made in ZAMAK
- ✦ New design giving a fresh impetus to the latch lock world
- ✦ Various fixing hole sizes
- ✦ Suited for padlock loops from 5 to 8mm diameter
- ✦ Three Body Lengths 31,70mm, 20,00mm, 19,50mm


### Four Available fixings




**Quick washer**  
(For 32 & 20mm body length)



**Quick Fixing**  
(Only 20mm body length)  
Panel thickness from 0,8 to 1,6mm




**Nut**  
(For 32 & 20mm body length)




**Screw fixing for wood panels**  
(Only available with 19mm body length and restrained head)

### Two Available Head Shapes


**Ergonomic Design = ELOH**



**Restrained Design = ELOW**



|                     |   |  |
|---------------------|---|--|
| <b>ELOW</b>         | Latch lock with low head  |  |
| <b>ELOH</b>         | Latch lock with high ergonomic head   |  |
| <b>Body Lengths</b> |   |  |
| <b>09</b>           | 19,5mm – special version with 4 screws fixing – only with ELOW                  |  |
| <b>20</b>           | 20MM  |  |
| <b>32</b>           | 31,7MM  |  |
| <b>Piercing</b>     |   |  |
| <b>K</b>            | 16,6 x diameter 19,1mm  |  |
| <b>H</b>            | Diameter 17,7 x 20,3mm (only available on snap in fixing version – ELOW/H20)    |  |
| <b>J</b>            | 16,0 x diameter 19,1mm  |  |
| <b>Z</b>            | Diameter 23mm (only available on special version with 4 screws – ELOW09)        |  |
| <b>Shutter</b>      |   |  |
| <b>0</b>            | Shutter not available   |  |
| <b>Cam Fixing</b>   |   |  |
| <b>C6</b>           | Cam fitted with a clip (max 2mm cam thickness)                                  |  |
| <b>S6</b>           | Cam with star piercing fixed with screw and washer                              |  |
| <b>S7</b>           | Cam with cross piercing fixed with screw and washer                             |  |
| <b>Key Rotation</b> |   |  |
| <b>01</b>           | 90° Clockwise   |  |
| <b>Finish</b>       |   |  |
| <b>7B</b>           | Body and head in Bright Nickel  |  |
| <b>2A</b>           | Body and head in Bright Chrome  |  |
| <b>8H</b>           | Body in Bright Nickel and head in Black   |  |
| <b>1A</b>           | Body in Bright Nickel and head in White powder coating <small>(RAL9010)</small> |  |
| <b>Lock Fixing</b>  |   |  |
| <b>N</b>            | Nut Fixing  |  |
| <b>H</b>            | Horseshoe clip (please specify panel thickness)                                 |  |
| <b>S</b>            | Snap In fixing (please specify panel thickness)                                 |  |
| <b>Z</b>            | Fixing with 4 screws (not supplied)   |  |
| <b>Master</b>       |   |  |
| <b>0</b>            | No masterkey system   |  |

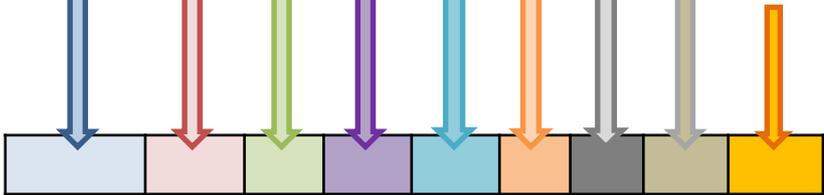

**EXAMPLE**

|             |           |          |          |           |           |           |          |          |
|-------------|-----------|----------|----------|-----------|-----------|-----------|----------|----------|
| <b>ELOW</b> | <b>32</b> | <b>K</b> | <b>0</b> | <b>LC</b> | <b>01</b> | <b>7B</b> | <b>N</b> | <b>0</b> |
|-------------|-----------|----------|----------|-----------|-----------|-----------|----------|----------|

ELOW Lock – 32mm body length- fixing hole size diameter 19,1 x 16,6mm -- Cam fitted with e-clip - 90° Movement Clockwise – nickel finish – Nut fixing - Without Master.

Lowe & Fletcher Inc.  
124 James Street  
Holland MI-49424

T: +1 (616) 994 0490  
F: +1 (616) 994 0480  
E: [sales@loweandfletcherinc.com](mailto:sales@loweandfletcherinc.com)  
W: [www.loweandfletcherinc.com](http://www.loweandfletcherinc.com)



**L&F** A Lowe & Fletcher Group Company